



3M High Flow Filters that include Integrated Membrane Pre-Activated Carbon Technology ("I.M.P.A.C.T.") media have **high surface area** for **excellent sediment holding capabilities** with **low pressure-drop**.

### Single-Application Post Mix Filtration Solutions

High Flow HF Series of Cartridges				
Part Number	Cartridge	Flow Rate (LPM)	Capacity (Litres)	Reduction Claims
7100053825	HF10	3.8	7,600	Bacteria <sup>2</sup> , particulate, chlorine taste and odour, cyst <sup>1</sup>
7100022068	HF20-E	5.7	34,069	Particulate, chlorine taste and odour, cyst <sup>1</sup>
7000001676	HF25	5.7	37,854	Particulate, chlorine taste and odour
7100022069	HF30-E	6.3	52,996	Particulate, chlorine taste and odour, cyst <sup>1</sup>
7000001705	HF35	6.3	47,696	Particulate, chlorine taste and odour
7000001665	HF40	7.9	94,635	Bacteria <sup>2</sup> , particulate, chlorine taste and odour, cyst <sup>2</sup>
7000051728	HF45	7.9	94,635	Particulate, chlorine taste and odour
7000001666	HF60	12.6	132,489	Bacteria <sup>2</sup> , particulate, chlorine taste and odour, cyst <sup>2</sup>
7100006231	HF65	12.6	132,489	Particulate, chlorine taste and odour
7000001667	HF90	18.9	204,412	Bacteria <sup>2</sup> , particulate, chlorine taste and odour, cyst <sup>2</sup>
7000001669	HF95	18.9	204,412	Particulate, chlorine taste and odour

<sup>1</sup> Based on the use of Cryptosporidium parvum oocysts. Tested and verified by the manufacturer's laboratory.  
<sup>2</sup> As tested with E. Coli ATCC (11229). Tested and verified by manufacturer's laboratory.  
<sup>3</sup> Based on the use of Cryptosporidium parvum oocysts. Certified to NSF Standard 53 for Cyst reduction.

### Multi-Application Post Mix Filtration Solution

Dual Port DP Series of Systems				
Part Number	System <sup>1</sup>	Flow Rate (LPM)	Capacity (Litres)	Reduction Claims
7000042841	DP190	18.9	204,412	Bacteria <sup>4</sup> , particulate, chlorine taste and odour, cyst <sup>3</sup> , scale
7100007038	DP290	37.9	408,823	
7100007041	DP390	56.8	613,236	
Part Number	Replacement Cartridge Pack <sup>2</sup>	Flow Rate (LPM)	Capacity (Litres)	Reduction Claims
7000029268	DP190 CP	18.9	204,412	Bacteria <sup>4</sup> , particulate, chlorine taste and odour, cyst <sup>3</sup> , scale
7000050525	DP290 CP	37.9	408,823	
7000125646	DP390 CP	56.8	613,236	

<sup>1</sup> System includes modular manifold, x1 HF8-S scale feeder and HF90 (DP190 includes x1 HF90, DP290 includes x2 HF90, DP390 includes x3 HF90)  
<sup>2</sup> Replacement cartridge pack includes x1 HF8-S scale feeder and HF90 (DP190 CP includes x1 HF90, DP290 CP includes x2 HF90, DP390 CP includes x3 HF90)  
<sup>3</sup> Based on the use of Cryptosporidium parvum oocysts. Certified to NSF Standard 53 for Cyst reduction.  
<sup>4</sup> As tested with E. Coli ATCC (11229). Tested and verified by manufacturer's laboratory.

Product Selection and Use:
Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.
Warranty, Limited Remedy and Disclaimer:
Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.
Limitation of Liability:
Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.




Separation & Purification Sciences Division  
 3M United Kingdom plc  
 3M Centre, Cain Road  
 Bracknell RG12 8HT  
 Berkshire  
 +44(0) 845 6025 327

Clear things up at [3M.co.uk/Foodservice](http://3M.co.uk/Foodservice)

3M and Recipe Quality Water are trademarks of 3M Company. Please recycle. Printed in UK. © 2019 3M Company. All rights reserved.

## Refreshing honesty: Chlorine and colas don't mix.

Chlorine comes with good news and bad news. The good news is water utilities use it to make water safe to consume. The bad news is it can also alter the taste of cold beverages. This can potentially hurt some of the most important parts of your operation. Fortunately, you can reduce the chlorine in your water to help ensure you're consistently serving quality beverages with 3M™ Foodservice Water Filtration Products.

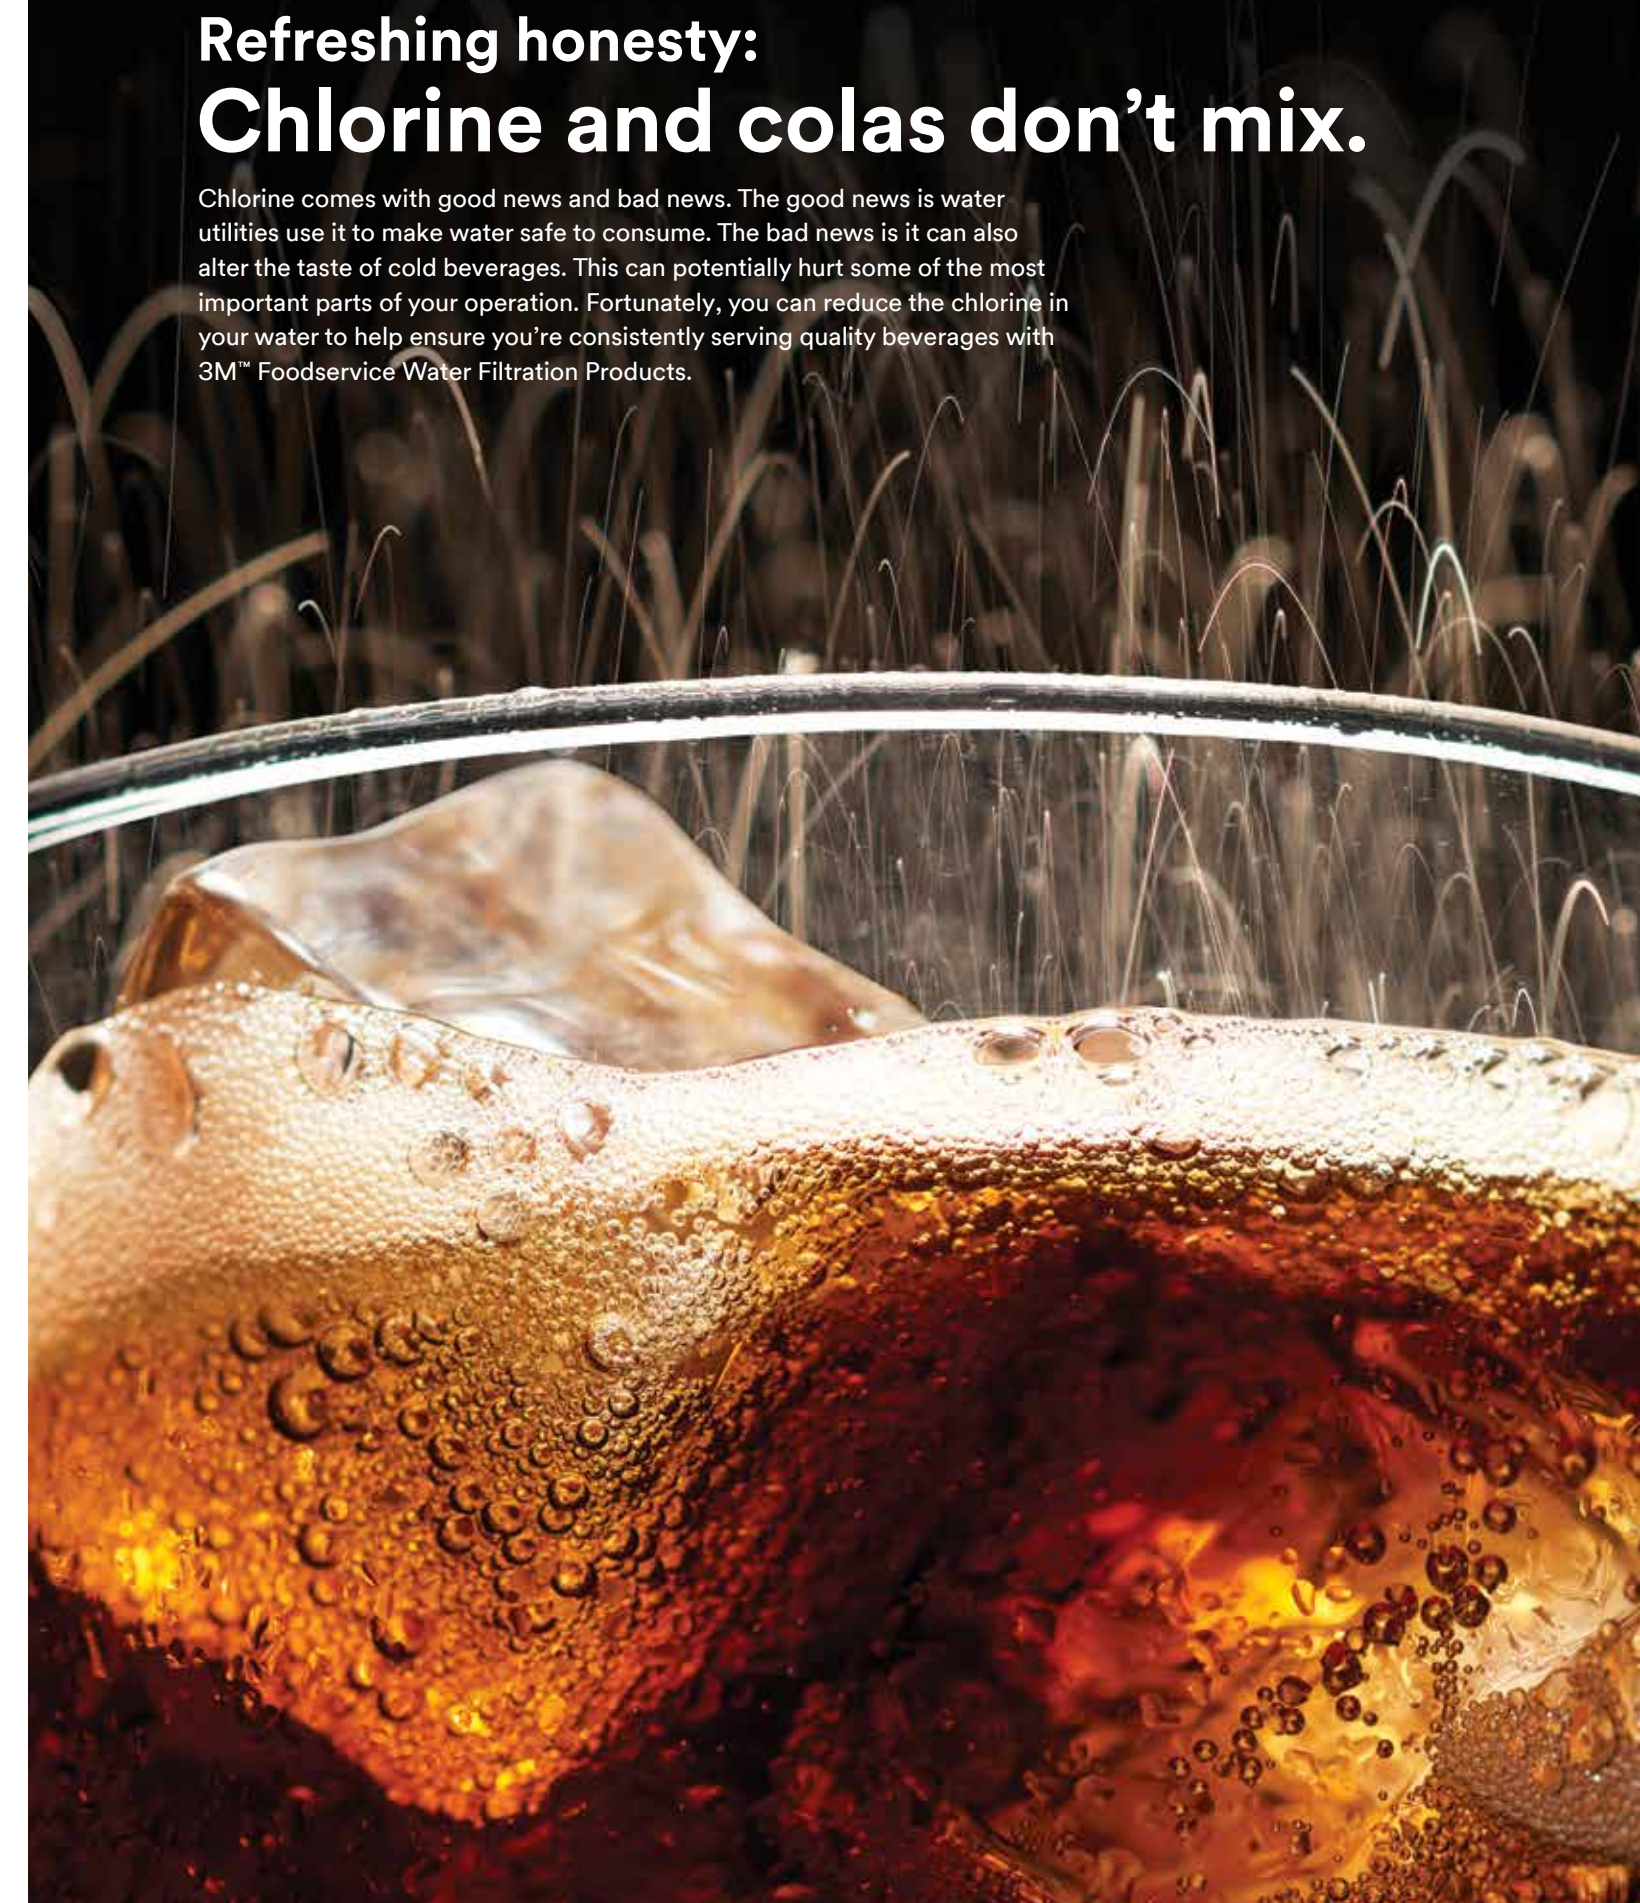

# Customers want quality, not chlorine.

## Subpar soft drinks are bad for business.

Soft drinks and other cold beverages made from water containing chlorine may have an off-taste or odour. Keep your customers coming back for more with 3M™ Foodservice Water Filtration Products, featuring activated carbon designed to help reduce chlorine.



## Water filtration technology.


3M™ High Flow Series Products include the option of replacement filters featuring Integrated Membrane Pre-Activated Carbon Technology ("I.M.P.A.C.T."), which provides excellent cartridge life and economy<sup>1</sup>.

### High Flow HF90

- ▶ Single-cartridge flow rates and capacities previously available only with three- or four-cartridge systems<sup>1</sup>
- ▶ Up to 12-month cartridge life
- ▶ Fast and easy cartridge change-outs with Sanitary Quick Change (SQC) encapsulated cartridge design
- ▶ Direct or easily adaptable connections to existing plumbing lines
- ▶ Certification to NSF Standard 53 for cyst reduction<sup>1</sup>
- ▶ Reduction of 99.99 percent of waterborne bacteria<sup>1,3</sup>
- ▶ **Recipe Quality Water™** for all commercial foodservice applications

Carbon block technology has more than **4X** the chlorine taste and odour reduction capacity of the leading competitor's pre-coat filter

No mess, no stress  
**SQC**  
(Sanitary Quick Change)  
filters for fast and easy change-outs

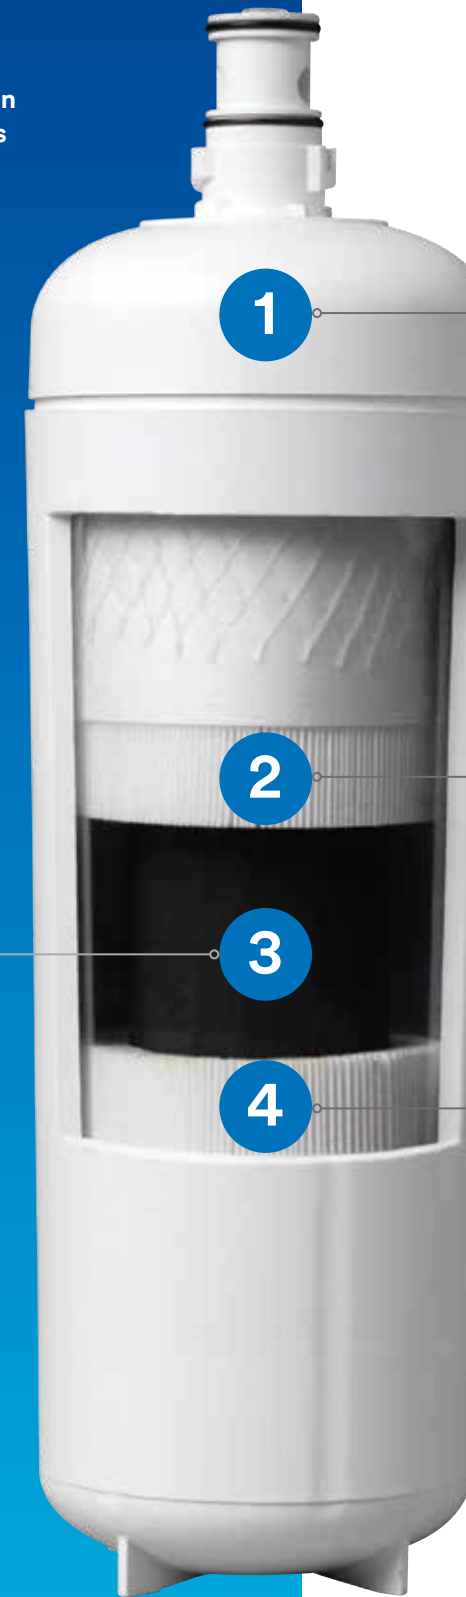

1 Polypropylene housing

2 Media with pleated membrane design<sup>1</sup> helps provide cyst<sup>2</sup> and bacteria<sup>3</sup> reduction and excellent sediment holding capabilities with minimal pressure drop

3 Pleated membrane media has a high surface area for excellent sediment holding capacity

<sup>1</sup>Filters featuring the Integrated Membrane Pre-Activated Carbon Technology ("I.M.P.A.C.T.") media can clearly be identified by the ("I.M.P.A.C.T.") icon on the product label.

<sup>2</sup>Based on the use of Cryptosporidium parvum oocysts.

<sup>3</sup>As tested with E. Coli ATCC (11229). Tested and verified by manufacturer's laboratory.

## Multi-Application Dual-Port System

### Cold Beverages, Ice and Coffee DP290

#### Applications

##### Fountain/Post Mix

- ▶ High Volume or Triple Carbonator, FCB and/or Non-Carb Dispensers

##### Medium to High Volume Coffee/Tea

- ▶ 1, 2 and 3-Warmer Brewers, Liquid Coffee, Airpot Brewers, 11 litre Urns and 11 and 15-litre Tea Brewers

##### Ice Machines

- ▶ Commercial Cubers and/or Flakers



## How a Multi-Application System Works One system, two filtration streams.

### Model DP190 System

